
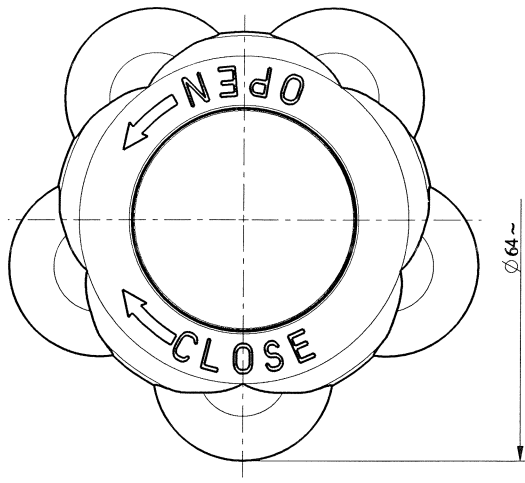


- Markings:
- CAVAGNA GROUP symbol 
 - EU
 - ISO V
 - 25E
 - W.P. 230 bar
 - Year and month of construction (Ex: 2009/01)
 - G3/4" DIN9
 - (Production order)
 - O₂
 - Π 0029

Temperature range: - 40° +65°C
 Gland Nut closure torque: 75 - 90 Nm
 Orifice: \varnothing 4mm
 W.P. 230 bar
 Cv 0,73
 Operating Torque: 2 Nm
 Closure Torque: 3 Nm



7	Protection cap blue RAL5002	1	PA 6	1671101012
6	Nut M8 INOX	1	X5CrNiMo1712 (1.4401 AISI316)	1071100164
5	Handwheel	1	EN AC-AISI11Cu2(Fe) UNI EN 1706	0271103032
4	Assembled Spindle 300bar	1	/	1379500239
3	Assembled piston	1	/	0379500029
2	P1020 Body 25E-G3/4" DIN/9	1	Cu Zn40 Pb2 (CW617N) EN 12165	0171506574
1	Filter	1	/	1079500170
Pos	DENOMINATION	Q.	MATERIAL	DRAW NR.

DESCRIPTION		M2009 Valve for O ₂ 25E-G3/4" DIN9			
GEN. TOLL. ±/	GEN. FILL. R /	ANG. TOLL. ±/	DRAFT /	SCALE 3:2	SHEET 1 / 1
RESPONS.	DRAWN	ISSUE	MATERIAL		
DATE	19-04-11	19-04-11			
SIGNATURE	Fretini	Cazzago			
NUMBER	15510	PROJECT	08769		
SIGN.	Treccani	REFERENCE	/		
INDEX	A4	XXXXX	XXXXX		
		PROJECT	DRAW NUMBER		
		08769	VOB2SOS017		



